


Diagram of a 6-core cable with 12 conductors, showing 6 twisted pairs. Each pair consists of a twisted pair of conductors (left) and a single conductor (right). The twisted pairs are labeled T333-26 through T333-31 with a twist rate of 3x2,5. The single conductors are labeled B16A with a twist rate of 1x1,5. The conductors are connected to terminals L2, L3, L1, L2, L3, L1 from top to bottom.



| Obciążenie | Nr rzs. | Nr obw. | Nazwa obwodu |
|------------|---------|---------|----------------------|
| 12kW | - | 01 | Zasilanie |
| | - | 1 | Oświetlenie |
| | - | 2 | Oświetlenie |
| | - | 3 | Oświetlenie |
| | - | 4 | Oświetlenie |
| | - | 5 | Oświetlenie |
| | - | 6 | Oświetlenie |
| | - | 7 | Gn. 1-faz. |
| | - | 8 | Gn. 1-faz. |
| | - | 9 | Gn. 1-faz. |
| | - | 10 | Gn. 1-faz. |
| | - | 11 | Gn. 1-faz. |
| | - | 12 | Gn. 1-faz. |
| | - | 13 | Gn. 1-faz. |
| | - | 14 | Gn. 1-faz. |
| | - | 15 | Gn. 1-faz. |
| | - | 16 | Gn. 1-faz. |
| | - | 17 | Gn. 1-faz. |
| | - | 18 | Gn. 1-faz. |
| | - | 19 | Gn. 1-faz. |
| | - | 20 | Gn. 1-faz. |
| | - | 21 | Gn. 1-faz. |
| | - | 22 | Gn. 1-faz. |
| | - | 23 | Gn. 1-faz. komputery |
| | - | 24 | Gn. 1-faz. komputery |
| | - | 25 | Gn. 1-faz. komputery |
| | - | | |
| | - | | |

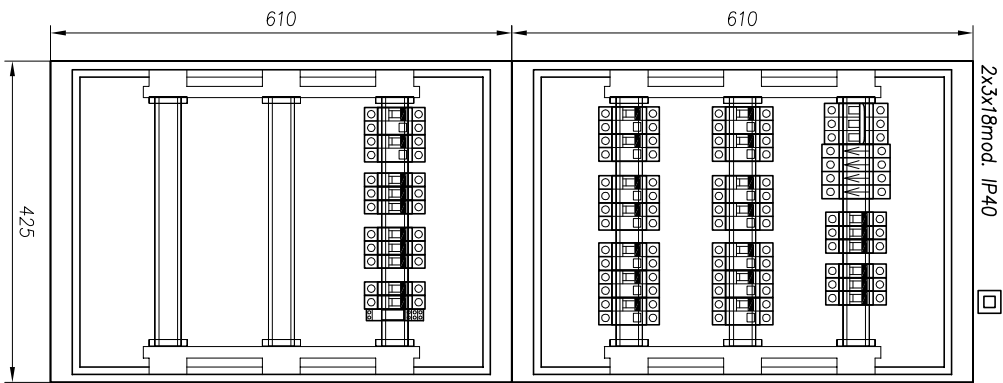